

DS-2CE56C0T-IRMF HD 720p IR Turret Camera



- HD 720p turret camera
- Smart IR: up to 20 m IR distance
- Water and dust resistant (IP67)
- 4 in 1 (4 signals switchable TVI/AHD/CVI/CVBS)

▪ Specification

Camera	
Day & Night	IR Cut Filter
Signal System	PAL/NTSC
Min. Illumination	0.01 Lux@(F1.2, AGC ON), 0 Lux with IR
Image Sensor	1 MP CMOS
Shutter Time	PAL: 1/25 s to 1/50,000 s;NTSC: 1/30 s to 1/50,000 s
Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 75°, Rotation: 0° to 360°
Max. Resolution	1280 (H) × 720 (V)
Lens	
Lens Type	Fixed focal lens, 2.8 mm, 3.6 mm, and 6 mm optional
Focal Length & FOV	Field of view: 70.9° (3.6 mm), 92° (2.8 mm), 56.7° (6 mm)
Lens Mount	M12
Illuminator	
Supplement Light Type	IR
Supplement Light Range	Up to 20 m
Image	
Frame Rate	720p@25fps/720p@30fps
SNR	>62 dB
Interface	
Video Output	1 HD analog output
General	
Power	12 VDC±15%, max. 4 W
Dimension	89.47 mm × 67.6 mm (3.52" × 2.7")
Weight	Approx. 340 g (0.75 lb.)
Operating Condition	-40 °C to 60 °C (-40 °F to 140 °F), humidity: 90% or less (non-condensation)
Approval	
Protection	IP67


▪ Available Model

DS-2CE56COT-IRMF(2.8mm)

DS-2CE56COT-IRMF(3.6mm)



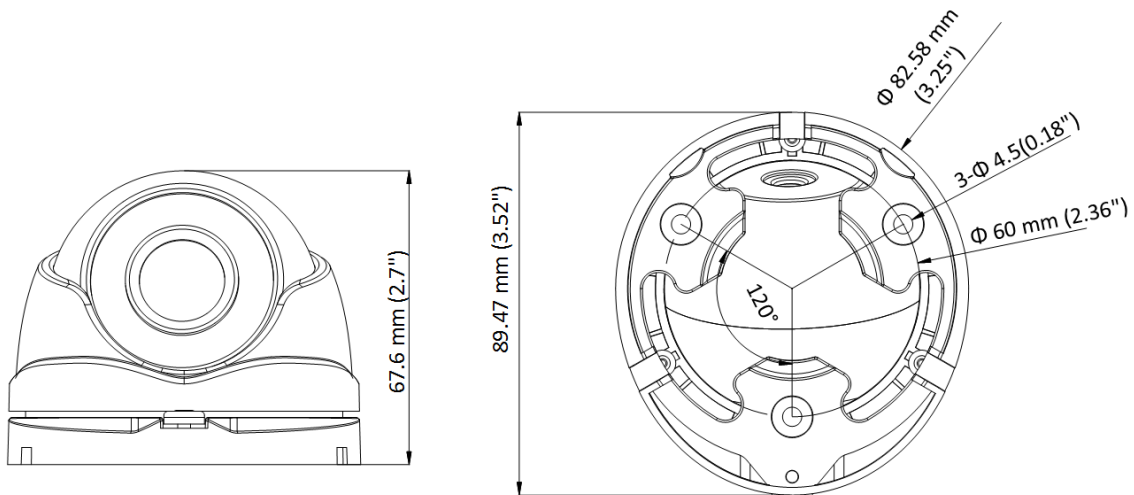


DS-2CE56COT-IRMF(6mm)

▪ Dimension



▪ **Accessory**

▪ **Optional**

DS-1272ZJ-110-TRS Wall Mount	DS-1H18	DS-1280ZJ-XS Junction Box	DS-1275ZJ-SUS Vertical Pole Mount	DS-1276ZJ-SUS Corner Mount
				

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

